


## Q11.4-TC-10 – Handheld Helium Purity Meter



Helium Detector

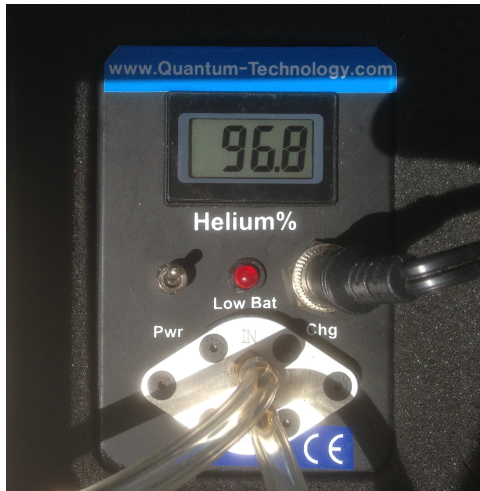

Helium detector with flowmeter and heavy-duty case

### Features:

- Range: 0 – 100 % Helium
- Accuracy:  $\pm 1$  %
- Display Accuracy: 0.1 %
- Signal Output: 0 – 100mV
- Response time: < 60 sec to accurate reading
- Sensor Type: Thermal Conductivity Detector
- Sensor Life: Estimated 60 months in room temperature
- Warranty: 12 months under standard conditions of use
- Operating Temp: 0 to 50 oC
- Operating Humidity: 0 to 95 RH
- Storage Temperature: -10 to 60 oC
- Temperature Compensation: Compensated
- Power: Rechargeable Ni-Cd/Ni-Mh Battery System
- Flowmeter for consistent measurement
- Heavy duty box
- Weight: approximately 2 lbs

Call +1 604 222 5539 or email: [sales@quantum-technology.com](mailto:sales@quantum-technology.com)

to connect with our technical/sales staff.